



---

INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

**(51) International Patent Classification <sup>7</sup> :**

H04M 19/00, 3/36

## A1

**(11) International Publication Number:**

**WO 00/39994**

**(43) International Publication Date:**

6 July 2000 (06.07.00)

**(21) International Application Number:** PCT/US99/31063

**(22) International Filing Date:** 28 December 1999 (28.12.99)

**(30) Priority Data:**

09/224,568

30 December 1998 (30.12.98) US

US

**(71) Applicant: ALCATEL USA SOURCING, L.P. [US/US]; 1000 Coit Road, Plano, TX 75075 (US).**

(72) Inventors: ABDOLLAHI, Amir, 1404 Land Drive, Plano, TX 75093 (US). MILLER, Brian, L.; 36 Jason Court, Petahuma, CA 94954 (US).

**(74) Agent: FISH, Charles, S.; Baker & Botts, L.L.P., 2001 Ross Avenue, Dallas, TX 75201-2980 (US).**


(81) Designated States: AE, AL, AM, AT, AU (Utility model), AU, AZ, BA, BB, BG, BR, BY, CA, CH, CN, CR, CU, CZ, CZ (Utility model), DE, DE (Utility model), DK, DK (Utility model), EE, EE (Utility model), ES, FI, FI (Utility model), GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SK (Utility model), SL, TJ, TM, TR, TT, UA, UG, UZ, VN, YU, ZA, ZW, ARIPO patent (GH, GM, KE, LS, MW, SD, SL, SZ, TZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG).

**Published**

***With international search report.***

**Before the expiration of the time limit for amending the claims and to be republished in the event of the receipt of amendments.**

(54) Title: SYSTEM AND METHOD OF POWER LIMITING CALL PROCESSING IN TELECOMMUNICATIONS EQUIPMENT

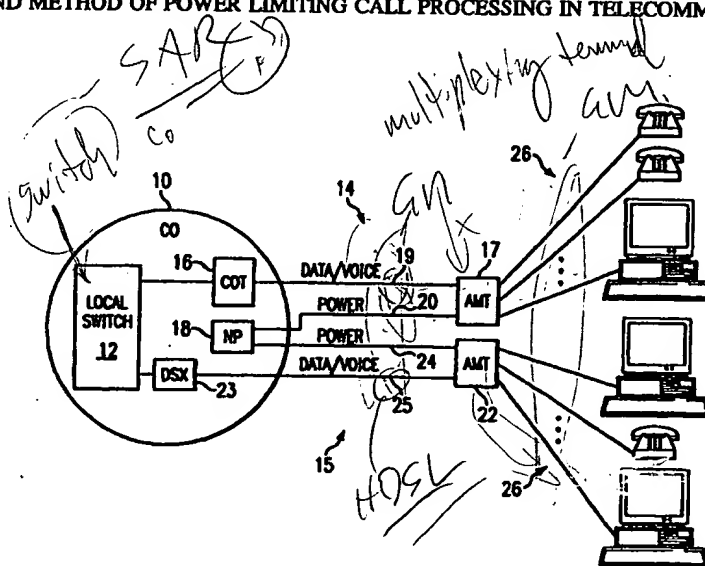

**(57) Abstract**

A system and method of limiting power consumption in a telecommunications equipment coupled between a plurality of far end subscriber lines and a plurality of near end subscriber lines are provided. The method includes monitoring and determining a number of ringing subscriber lines, comparing the number of ringing subscriber lines to a predetermined ringing threshold, monitoring and determining a number of off-hook subscriber lines, comparing the number of off-hook subscriber lines to a predetermined off-hook threshold, and blocking further ringing and/or off-hook subscriber lines in response to the number of ringing and/or off-hook subscriber lines reaching or exceeding the respective predetermined ringing and off-hook thresholds.

**FOR THE PURPOSES OF INFORMATION ONLY**

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AL	Albania	ES	Spain	LS	Lesotho	SI	Slovenia
AM	Armenia	FI	Finland	LT	Lithuania	SK	Slovakia
AT	Austria	FR	France	LU	Luxembourg	SN	Senegal
AU	Australia	GA	Gabon	LV	Latvia	SZ	Swaziland
AZ	Azerbaijan	GB	United Kingdom	MC	Monaco	TD	Chad
BA	Bosnia and Herzegovina	GE	Georgia	MD	Republic of Moldova	TG	Togo
BB	Barbados	GH	Ghana	MG	Madagascar	TJ	Tajikistan
BE	Belgium	GN	Guinea	MK	The former Yugoslav Republic of Macedonia	TM	Turkmenistan
BF	Burkina Faso	GR	Greece	ML	Mali	TR	Turkey
BG	Bulgaria	HU	Hungary	MN	Mongolia	TT	Trinidad and Tobago
BJ	Benin	IE	Ireland	MR	Mauritania	UA	Ukraine
BR	Brazil	IL	Israel	MW	Malawi	UG	Uganda
BY	Belarus	IS	Iceland	MX	Mexico	US	United States of America
CA	Canada	IT	Italy	NE	Niger	UZ	Uzbekistan
CF	Central African Republic	JP	Japan	NL	Netherlands	VN	Viet Nam
CG	Congo	KE	Kenya	NO	Norway	YU	Yugoslavia
CH	Switzerland	KG	Kyrgyzstan	NZ	New Zealand	ZW	Zimbabwe
CI	Côte d'Ivoire	KP	Democratic People's Republic of Korea	PL	Poland		
CM	Cameroon	KR	Republic of Korea	PT	Portugal		
CN	China	KZ	Kazakhstan	RO	Romania		
CU	Cuba	LC	Saint Lucia	RU	Russian Federation		
CZ	Czech Republic	LI	Liechtenstein	SD	Sudan		
DE	Germany	LK	Sri Lanka	SE	Sweden		
DK	Denmark	LR	Liberia	SG	Singapore		
EE	Estonia						

SYSTEM AND METHOD OF POWER LIMITING CALL PROCESSING  
IN TELECOMMUNICATIONS EQUIPMENT

TECHNICAL FIELD OF THE INVENTION

This invention is related in general to the field of telecommunications equipment. More particularly, the invention is related to a system and method of power limiting call processing in telecommunications equipment.

BACKGROUND OF THE INVENTION

The Internet and the proliferation of many forms of customer premises equipment have prompted increasing demand for subscriber connections to the telecommunications network. Existing copper cabling carrying a single voice or data channel have traditionally been used to connect subscribers to the central office. Because the expense associated with placing additional copper cabling from the central office to the subscribers is prohibitive, a solution to provide additional subscriber connections with existing copper cabling is the pair gain equipment. The pair gain equipment enables the same copper cabling or twisted pair to carry multiple channels of telecommunications traffic signals to multiple subscriber lines from the central office.

Related technical references includes Bellcore GR-303-CORE, *Generic Requirements for Integrated Digital Loop Carrier System*, Issue 1, September 1995; TR-NWT-000057, *Functional Criteria for Digital Loop Carrier Systems*, Issue

2, January 1993; TR-TSY-000008, *Digital Interface Between SLC 96 Digital Loop Carrier and a Local Digital Switch*, Issue 2, August 1987, Revision 1, September 1993; and ANSI T1.401, *Interface Between Carriers and Customer Installations Analog Voicegrade Switched Access Lines Using Loop-Start and Ground-Start Signalling*, 1988. These references are incorporated herein by reference.

#### SUMMARY OF THE INVENTION

10       Accordingly, there is a need for pair gain equipment that enables adding subscriber lines without the additional expenses of placing copper cabling. Such pair gain equipment may take advantage of existing copper cabling to obtain supply power from a remotely located network power  
15       supply. In such a configuration, the number of twisted pairs devoted to supply remote power must be balanced with the number of twisted pairs devoted to carrying voice, video and data signals in order to provide the maximum number of subscriber lines. Accordingly, power consumption  
20       must be balanced with the amount of power that can be delivered on the fixed number of twisted pairs to the access multiplexing terminal.

25       In one aspect of the invention, a method of power limiting call processing in a telecommunications equipment coupled between a plurality of far end subscriber lines and a plurality of near end subscriber lines includes monitoring and determining a number of ringing subscriber  
30       lines, comparing the number of ringing subscriber lines to a predetermined ringing threshold, blocking further ringing on subscriber lines in response to the number of ringing subscriber lines reaching or exceeding the predetermined ringing threshold, and providing a reorder signal to a blocked ringing far end subscriber line.

In another aspect of the invention, an access multiplexing terminal coupled between a central office and a plurality of subscribers includes a first plurality of line cards coupled to a plurality of subscriber lines, a second plurality of line cards, a first plurality of twisted pairs coupling the second plurality of line cards to the central office, a second plurality of twisted pairs coupling the access multiplexing terminal to a network power supply, and a bandwidth allocator monitoring a number of ringing subscriber lines and a number of off-hook subscriber lines, the bandwidth allocator blocking further ringing and off-hook subscriber lines in response to the numbers thereof exceeding predetermined ringing and off-hook thresholds.

In yet another aspect of the invention, a system and method of limiting power consumption in a telecommunications equipment coupled between a plurality of far end subscriber lines and a plurality of near end subscriber lines are provided. The method includes monitoring and determining a number of ringing subscriber lines, comparing the number of ringing subscriber lines to a predetermined ringing threshold, monitoring and determining a number of off-hook subscriber lines, comparing the number of off-hook subscriber lines to a predetermined off-hook threshold, and blocking further ringing and/or off-hook subscriber lines in response to the number of ringing and/or off-hook subscriber lines reaching or exceeding the respective predetermined ringing and off-hook thresholds.

#### BRIEF DESCRIPTION OF THE DRAWINGS

For a better understanding of the present invention, reference may be made to the accompanying drawings, in which:

5       FIGURE 1 is a simplified block diagram of telecommunications equipment in the carrier access area according to the teachings of the present invention;

      FIGURE 2 is a functional block diagram of the access multiplex terminal according to the teachings of the present invention;

10       FIGURE 3 is a state transition diagram of an exemplary embodiment of a method of power limiting call processing according to the teachings of the present invention; and

      FIGURE 4 is a data flow diagram of an exemplary embodiment of reorder signal processing according to the teachings of the present invention.

#### DETAILED DESCRIPTION OF THE INVENTION

20       The preferred embodiments of the present invention are illustrated in FIGURES 1-4, like reference numerals being used to refer to like and corresponding parts of the various drawings.

      Referring to FIGURE 1, a simplified block diagram of the operating environment of the pair gain equipment is shown. A central office 10 includes a local switch 12, 25 which is coupled to pair gain equipment 14 and 15. Pair gain equipment 14 includes a central office terminal (COT) 16 and a remote terminal or an access multiplexing terminal (AMT) 17. Pair gain equipment 15 includes only an access multiplexing terminal 22. Central office terminal 16 is 30 coupled to local switch 12 and is coupled to access multiplexing terminal 17 via copper twisted pairs 19 carrying data, voice, video and other forms of traffic. Access multiplexing terminal 17 is powered by a remotely

located network power source (NP) 18, which may be located in central office 10, as shown, or elsewhere. Copper twisted pairs 20 carry network power to access multiplexing terminal 17.

5        Access multiplexing terminal 22 of pair gain equipment 15 may also couple directly to local switch 12 through a digital cross-connect (DSX) 23. Access multiplexing terminal 22 is also powered by network power source 18 transmitted via a predetermined number of copper twisted  
10       pairs 24. Telecommunications traffic are transmitted between local switch 12 and access multiplexing terminal 22 via a predetermined number of copper twisted pairs 25. A number of subscribers 26 are coupled to access multiplexing terminals 17 and 22.

15       The number of copper twisted pairs used for carrying telecommunications traffic and the number of copper twisted pairs used for carrying power are balanced to provide the maximum feasible number of subscriber connections. Because  
20       the number of copper twisted pairs available is fixed, it is a limited resource that is required to carry both live traffic and power to the access multiplexing terminals. Each copper twisted pair may be used to carry one T1, an HDSL (high-bit-rate digital subscriber line), or power for  
25       a limited number of circuits. The amount of power required to support the access multiplexing terminals is dependent on the activity level of the circuits or the subscriber lines. In particular, the amount of power drawn is dependent on how many subscribers lines are off-hook, how many subscriber lines are ringing, and whether certain line  
30       card components are active or on standby.

Referring to FIGURE 2, a functional block diagram of access multiplexing terminal 17 or 22 is shown. The description of the access multiplexing terminal hereinafter

will refer to access multiplexing terminal 17 only, with the understanding that access multiplexing terminal 22 is similarly or equally constructed and operated. Access multiplexing terminal 17 includes line cards 30 which includes a predetermined number of active line cards 31 and at least one additional spare line card 32 for protection purposes. Line cards 30 includes line transceivers and framers and are coupled to DS1, T1, or HDSL transport interfaces. Line cards 30 are also coupled to one or more terminal processor and time slot interchangers (TPTs) 34, which may provide the functionality of shelf processor, DS0 timeswitch, shelf timing, datalink control, and tone generation. Terminal processor and time slot interchangers 34 manages the system's TR-008 interface over redundant subscriber buses to the transport units and directs the traffic to and from the appropriate narrowband channel units. Terminal processor and time slot interchangers 34 are in turn coupled to channel units 36, which are coupled to the subscriber equipment. Channel units 36 include slots for a number of line cards, including remote plain old telephone service (RPOT) line cards.

The remote plain old telephone service line cards (not shown) include a number of detectors. A loop current detector senses the off-hook condition at a telephone set. A ring trip detector senses when the telephone set goes off-hook during ringing. The remote plain old telephone service line cards also include a ringing relay, which is controlled by signaling from the central office terminal end to connect ringing to the subscriber line.

Network power arrives on copper twisted pairs 38, which may be at -130 volts. This DC network power is supplied to one or more network bank power supplies (NBPS) 40, which perform DC to DC conversion from the network



power level to the required regulated voltages for channel units 36 and common equipment cards. network bank power supplies 40 load share on the output.

5 A fuse and alarm panel (FAP) 42 is provided. Fuse and alarm panel 42 includes a fuse alarm and a number of alarm switches or contacts which close when certain monitored conditions reach or exceed predetermined thresholds. For example, the all channel busy condition causes a loop closure to a switch located on fuse and alarm panel 42.

10 An alarm unit (AU) 44 communicates with fuse and alarm panel 42. Alarm unit 44 interfaces with fuse and alarm panel 42 which may include the craft interface connection, a predetermined number of alarm inputs used as environmental sense points, and a number of control closure  
15 outputs. Alarm unit 44 monitors the power supply, provides craft interface to a craft terminal 45 via a craft port 46. Alarm unit 44 coordinates the alarm and maintenance functions at craft terminal 45. Alarm unit 44 further provides visual indicators such as different colored LEDs  
20 located on a faceplate of access multiplexing terminal 17.

A network ringing generator unit (NRGU) 50 converts the -48 volts DC backplane supply into a sine wave output suitable for ringing subscriber telephones. Typically the ringing voltage is approximately between 56 and 60 volts.  
25 Because power is required to ring the subscriber equipment, the number of telephone sets ringing at any one time is limited as so the total system power usage does not exceed the amount of power delivered on the twisted copper pairs.

30 There are two thresholds used to monitor and limit power usage. One threshold limits the number of subscriber lines that are off-hook, the other threshold limits the number of subscriber lines that are ringing. These thresholds may be set through provisioning. When these

thresholds are reached, the access multiplexing terminal enters into a blocking mode of operation to limit power consumption. TABLE A below provides the relationship between the two thresholds and the state of the ring relay and subscriber line interface circuit (SLIC) in the line card.

Off-Hook Threshold Reached	Ringing threshold Reached	State of Ring Relay in the Line Card	State of SLIC in the Line Card
No	No	ON	ACTIVE
No	Yes	OFF	ACTIVE
Yes	No	OFF	STANDBY
Yes	Yes	OFF	STANDBY

TABLE A

When the interface circuit is ACTIVE, the activity on the line is processed by the line card and the interface circuit draws more power when the subscriber goes off-hook. If the interface circuit is in STANDBY mode, less power is drawn. In STANDBY mode, the interface circuit is still capable of sensing activity on the line. When the ring relay is on, the subscriber telephone set rings in response to ringing signal. When the relay is off, the telephone ringing is blocked but the line card is still able to sense when ringing starts and stops. The term subscriber herein is used to refer to near end subscribers 24 coupled to access multiplexing terminals 17 and 22.

Referring to FIGURE 3 and TABLE B, a state transition diagram of power limiting call processing is shown. The state diagram describes the states and state transitions for a single subscriber line. However, some states in the

state machine are reached when certain conditions concerning the entire access multiplexing terminal become true. The "ref. no." column in TABLE B refers to the reference numerals used in FIGURE 3 to identify the various states.

Ref. No.	State	Ring Relay	SLIC	State Description
60	NULL	ON	ACTIVE	Idle but active
61	RINGING	ON	ACTIVE	Ringing signal is being received
62	ACTIVE	ON	ACTIVE	Line is carrying traffic
63	BLOCK RING	OFF	ACTIVE	Ringing threshold reached - ringing blocked
64	BLOCK BOTH	OFF	STANDBY	Reorder signal provided to far end if an alert message is received
65	BLOCK RING REORDER 1	OFF	STANDBY	First reorder time period of reorder tone and signaling
66	BLOCK RING REORDER 2	OFF	STANDBY	Second reorder time period; signaling may be different than the first reorder time period.
67	BLOCK BOTH REORDER 1	OFF	STANDBY	First reorder time period of reorder tone and signaling
68	BLOCK BOTH REORDER 2	OFF	STANDBY	Second reorder time period; signaling may be different than the first reorder time period
69	BLOCK RING SENDING OFF-HOOK	OFF	STANDBY	Connect off-hook signaling to the far end and start a 250 ms timer
70	BLOCK BOTH SENDING OFF-HOOK	OFF	STANDBY	Connect off-hook signaling to the far end and start a 250 ms timer

TABLE B

TABLE C below provides a summary description of the events shown in FIGURE 3.

Event	Description
Alert	Alert message is sent to the bandwidth allocator by the line card when it receives a ringing signal
Disconnect	Disconnect message is sent to the bandwidth allocator by the line card when the line card senses that ringing has stopped without a ring trip
Off-Hook	Line card sends this message to the bandwidth allocator when the near end subscriber goes off-hook or a ring trip occurs. When a ring trip occurs this is the only message that should be sent. No disconnect message is sent to the bandwidth allocator.
On-Hook	Line card sends this message to the bandwidth allocator when the near end subscriber goes on-hook.
Reorder 2 Timeout	A second reorder time period timer is started when reorder tone is supplied to the far end subscriber in reorder 2 state.
Reorder 1 Timeout	A first reorder time period timer is started when reorder tone is supplied to the far end subscriber in reorder 1 state.
Blocking State Message	This message is sent to each line card by the bandwidth allocator. The state of all subscriber lines on the line card is specified in this message.

TABLE C

NULL state 60 is idle but active. In NULL state 60, the ring relay is on and the subscriber line interface card is active. When an alert event occurs as when an alert message is sent by the line card and received by the bandwidth allocator, a transition to a RINGING state 61 is

made. RINGING state 61 is characterized by ringing signals being received. A disconnect event in RINGING state 61 causes a state transition back to NULL state 60. The disconnect event is caused by a disconnect message being sent by the line card and received by the bandwidth allocator. An off-hook event occurring during RINGING state 61 causes a transition to an ACTIVE state 62. The off-hook event may be indicative of an off-hook message being received by the bandwidth allocator, which indicates that the subscriber has gone off-hook in response to the ringing. ACTIVE state 62 is characterized by a line or channel that is carrying live traffic. An on-hook event occurring at this point causes a state transition back to NULL state 60. From NULL state 60, an off-hook event would cause a state transition to ACTIVE state 62.

Whenever the bandwidth allocator receives an off-hook or ringing message from a line card, it checks its database to determine whether a total call completion seconds threshold value has been reached. The call completion seconds threshold is preset to establish a total power consumption limit. Further, the receipt of an off-hook message causes a off-hook count to be incremented and the receipt of an on-hook message causes the off-hook count to be decremented. The off-hook count is compared with the off-hook threshold after each increment to determine whether the threshold has been reached. Similarly, the receipt of a ringing message causes a ringing count to be incremented and the receipt of an off-hook message or a disconnect message causes the ringing count to be decremented. The ringing count is compared with the ringing threshold after each increment to determine whether the threshold has been reached. Therefore, the number of lines off-hook and the number of lines ringing are

maintained by the bandwidth allocator to determine whether the respective thresholds have been reached.

From NULL state 60, the occurrence of a block ring event prompts a state transition to a BLOCK RING state 63.

5 The block ring event is characterized by the number of lines ringing reaching the ringing threshold. In BLOCK RING state 63, additional ringing on any line is blocked until an event occurs that enables an exit from the BLOCK RING state. For example, an off-hook event causes the  
10 ringing count to be decremented and further causes a state transition to ACTIVE state 62. An alert event indicative of an additional ringing line causes a transition from BLOCK RING state 63 to BLOCK RING SENDING OFF-HOOK state 69. BLOCK RING SENDING OFF-HOOK state 69 is the state in  
15 which additional ringing lines above the ringing threshold is processed. This process may be referred to as reorder signal processing. The reorder signal may be a tone of a predetermined frequency and pattern or an announcement.

From NULL state 60, a block both event causes a state  
20 transition to a BLOCK BOTH state 64. In BLOCK BOTH state 64, the receipt from a line card an alert message causes the transition to a BLOCK BOTH SENDING OFF-HOOK state 70. In BLOCK BOTH SENDING OFF-HOOK state 70, any additional ringing line as indicated by an alert message causes  
25 reorder signal processing.

Referring also to FIGURE 4, a diagram showing a  
reorder signal processing of above-threshold conditions is shown. Local switch 12 trips ringing on a line at its end, which is detected by line card 30. Line card 30 sends an  
30 alert message to bandwidth allocator 38. When there is an all channel busy condition, bandwidth allocator 38 responds by connecting the ringing line to off-hook signaling, which causes an off-hook signal to be sent to local switch 12 and

the starting of a timer. The timer is set to a very brief time span, such as 250 milliseconds. This tricks the switch into believing that the user equipment answered the call and causes local switch 12 to stop ringing at its end. At the expiration of the timer, bandwidth allocator 38 may act according to the value of a trunk conditioning parameter for a predetermined time period. A reorder signal is provided to the far end subscriber during this predetermined time period. The term "reorder signal" is used herein to refer to any signal, whether it be data, tone, voice recoding, or equivalent thereof. For example, the reorder signal may be a fast busy tone. As shown in FIGURE 3, the expiration of the timer causes a state transition from BLOCK RING SENDING OFF-HOOK state 69 to a BLOCK RING REORDER 1 state 65. During BLOCK RING REORDER 1 state 65, a first reorder signaling process may be performed. At the expiration of a first reorder timer, a state transition to a BLOCK RING REORDER 2 state 66 occurs. During BLOCK RING REORDER 2 state 66, a second reorder signaling process may be performed. After the time out of a second reorder timer, a state transition to BLOCK RING state 63 occurs.

As shown in FIGURE 4, if the trunk conditioning parameter is set to a predetermined value, then an on-hook signal is sent to local switch 12 for the predetermined time period, such as 15 seconds. If the trunk conditioning parameter is set to another value, an off-hook signal may be sent to local switch 12 for 15 seconds. Alternatively, different signaling may be done for two or more stages during the same time period, such as off-hook for the first 2.5 seconds followed by 12.5 seconds of idle or on-hook. The signaling of these stages may be provisioned through the trunk condition parameter.



Blocking and unblocking messages, set forth in TABLE C above, are sent by the bandwidth allocator to the line cards. These messages contain the identifier of the line card and the block or unblock state of each channel on the line card. Upon the receipt of this message, the line card is required to cause its subscriber lines to enter the blocked or unblocked state as specified by the message.

Alternatively, another method of the all channel busy treatment to the far end subscriber may use a twisted pair coupled between the access multiplexing terminal's fuse and alarm panel 38 and the local switch. When an all channel busy condition occurs, the access multiplexing terminal provides a loop closure to the switch across these wires. While loop closure is present, the switch does not complete calls to the access multiplexing terminal and returns a reorder signal to all terminating calls.

Therefore as described above, when the ringing threshold or both the ringing and the off-hook thresholds are reached, further ringing are blocked. An all channel busy or reorder signal is provided to the far end subscriber, and no ringing to the near end subscriber is allowed. When only the off-hook threshold is reached, no dialing tone is provided to the near end subscriber that goes off-hook, so that no calls can be made. Operating in this manner, the number of ringing channels and off-hook channels are limited to ensure that power consumed by the access multiplexing terminal does not exceed the power level deliverable on the fixed and limited number of twisted pairs.

Although the detailed description herein pertains primarily to pair gain equipment, the present invention is applicable to other types of telecommunications equipment.

Although several embodiments of the present invention and its advantages have been described in detail, it should be understood that mutations, changes, substitutions, transformations, modifications, variations, and alterations  
5 can be made therein without departing from the teachings of the present invention, the spirit and scope of the invention being set forth by the appended claims.

WHAT IS CLAIMED IS:

1. A method of power limiting call processing in a telecommunications equipment coupled between a plurality of far end subscriber lines and a plurality of near end subscriber lines, comprising:

monitoring and determining a number of ringing subscriber lines;

comparing the number of ringing subscriber lines to a predetermined ringing threshold;

blocking further ringing on subscriber lines in response to the number of ringing subscriber lines reaching or exceeding the predetermined ringing threshold; and

providing a reorder signal to a blocked ringing far end subscriber line.

2. The method, as set forth in claim 1, further comprising:

monitoring and determining a number of off-hook subscriber lines;

comparing the number of off-hook subscriber lines to a predetermined off-hook threshold;

blocking further subscriber lines going off-hook in response to the number of off-hook subscriber lines reaching or exceeding the predetermined off-hook threshold; and

not providing a dial tone to an blocked off-hook near end subscriber line.

3. The method, as set forth in claim 1, further comprising blocking both ringing subscriber lines and subscriber lines going off-hook in response to the number of ringing subscriber lines reaching or exceeding the predetermined ringing threshold and the number of off-hook subscriber lines reaching or exceeding the predetermined off-hook threshold.

4. The method, as set forth in claim 1, further comprising blocking both ringing subscriber lines and subscriber lines going off-hook in response to the number of off-hook subscriber lines reaching or exceeding the predetermined off-hook threshold.

5. The method, as set forth in claim 1, wherein providing the reorder signal comprises:

providing a first reorder signal for a first predetermined time period; and

providing a second reorder signal for a second predetermined time period.

6. The method, as set forth in claim 1, wherein providing the reorder signal comprises:

sending an off-hook signal to the far end subscriber line;

sending an on-hook signal to the far end subscriber line after sending the off-hook signal; and

providing the reorder signal to the far end subscriber line.

7. The method, as set forth in claim 5, wherein providing the reorder signal comprises:

providing the first reorder signal for 2.5 seconds;  
and

5 providing the second reorder signal for 12.5 seconds.

8. The method, as set forth in claim 5, wherein sending the reorder signal comprises providing an off-hook signal for the first and second predetermined time period.

10

9. The method, as set forth in claim 5, wherein sending the reorder signal comprises providing an on-hook signal for the first and second predetermined time period.

15 10. The method, as set forth in claim 5, wherein providing the reorder signal comprises:

providing an off-hook signal for the first predetermined time period; and

20 providing an idle signal for the second predetermined time period.

11. The method, as set forth in claim 5, wherein providing the reorder signal comprises:

25 providing an off-hook signal for the first predetermined time period; and

providing an on-hook signal for the second predetermined time period.

12. An access multiplexing terminal coupled between a central office and a plurality of subscribers, comprising:

5 a first plurality of line cards coupled to a plurality of subscriber lines;

a second plurality of line cards;

a first plurality of twisted pairs coupling the second plurality of line cards to the central office;

10 a second plurality of twisted pairs coupling the access multiplexing terminal to a network power supply; and

15 a bandwidth allocator monitoring a number of ringing subscriber lines and a number of off-hook subscriber lines, the bandwidth allocator blocking further ringing and off-hook subscriber lines in response to the numbers thereof exceeding predetermined ringing and off-hook thresholds.

13. A method of limiting power consumption in a telecommunications equipment coupled between a plurality of far end subscriber lines and a plurality of near end subscriber lines, comprising:

5        monitoring and determining a number of ringing subscriber lines;

         comparing the number of ringing subscriber lines to a predetermined ringing threshold;

10       monitoring and determining a number of off-hook subscriber lines;

         comparing the number of off-hook subscriber lines to a predetermined off-hook threshold;

15       blocking further ringing and/or off-hook subscriber lines in response to the number of ringing and/or off-hook subscriber lines reaching or exceeding the respective predetermined ringing and off-hook thresholds.

20       14. The method, as set forth in claim 13, further comprising providing a reorder signal to a blocked ringing far end subscriber line.

25       15. The method, as set forth in claim 13, further comprising not providing a dial tone to an blocked off-hook near end subscriber line.

         16. The method, as set forth in claim 13, wherein providing the reorder signal comprises:

         providing a first reorder signal for a first predetermined time period; and

30       providing a second reorder signal for a second predetermined time period.

17. The method, as set forth in claim 13, wherein providing the reorder signal comprises:

sending an off-hook signal to the far end subscriber line;

5 sending an on-hook signal to the far end subscriber line after sending the off-hook signal; and

providing the reorder signal to the far end subscriber line.

10 18. The method, as set forth in claim 16, wherein providing the reorder signal comprises:

providing the first reorder signal for 2.5 seconds; and

providing the second reorder signal for 12.5 seconds.

15

19. The method, as set forth in claim 16, wherein sending the reorder signal comprises providing an off-hook signal for the first and second predetermined time period.

20 20. The method, as set forth in claim 16, wherein sending the reorder signal comprises providing an on-hook signal for the first and second predetermined time period.

25 21. The method, as set forth in claim 16, wherein providing the reorder signal comprises:

providing an off-hook signal for the first predetermined time period; and

providing an idle signal for the second predetermined time period.

30



22. The method, as set forth in claim 16, wherein providing the reorder signal comprises:

providing an off-hook signal for the first predetermined time period; and

5 providing an on-hook signal for the second predetermined time period.

1/3

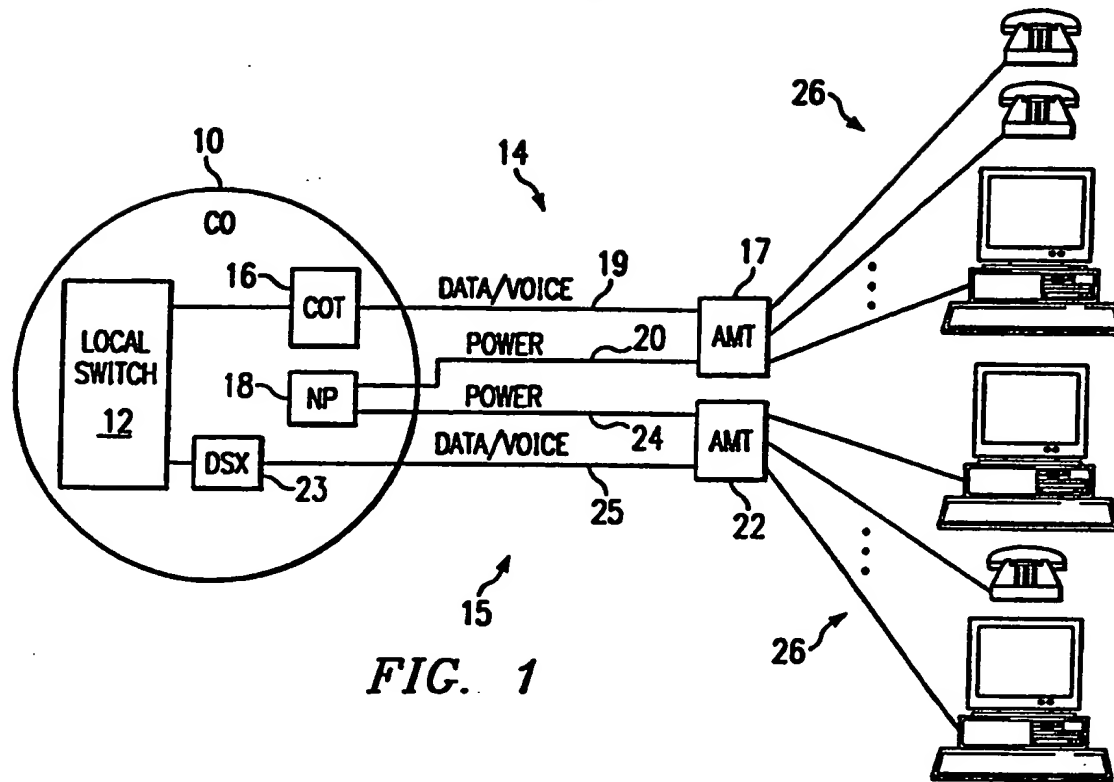


FIG. 1

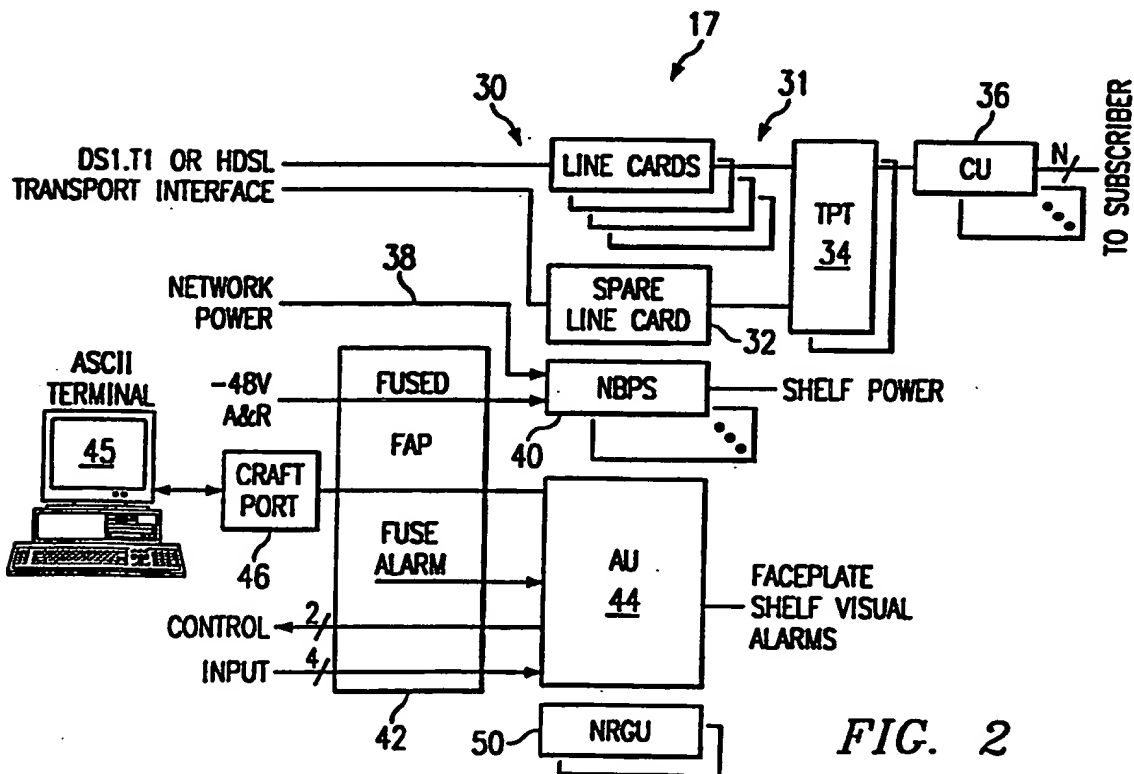


FIG. 2

2/3

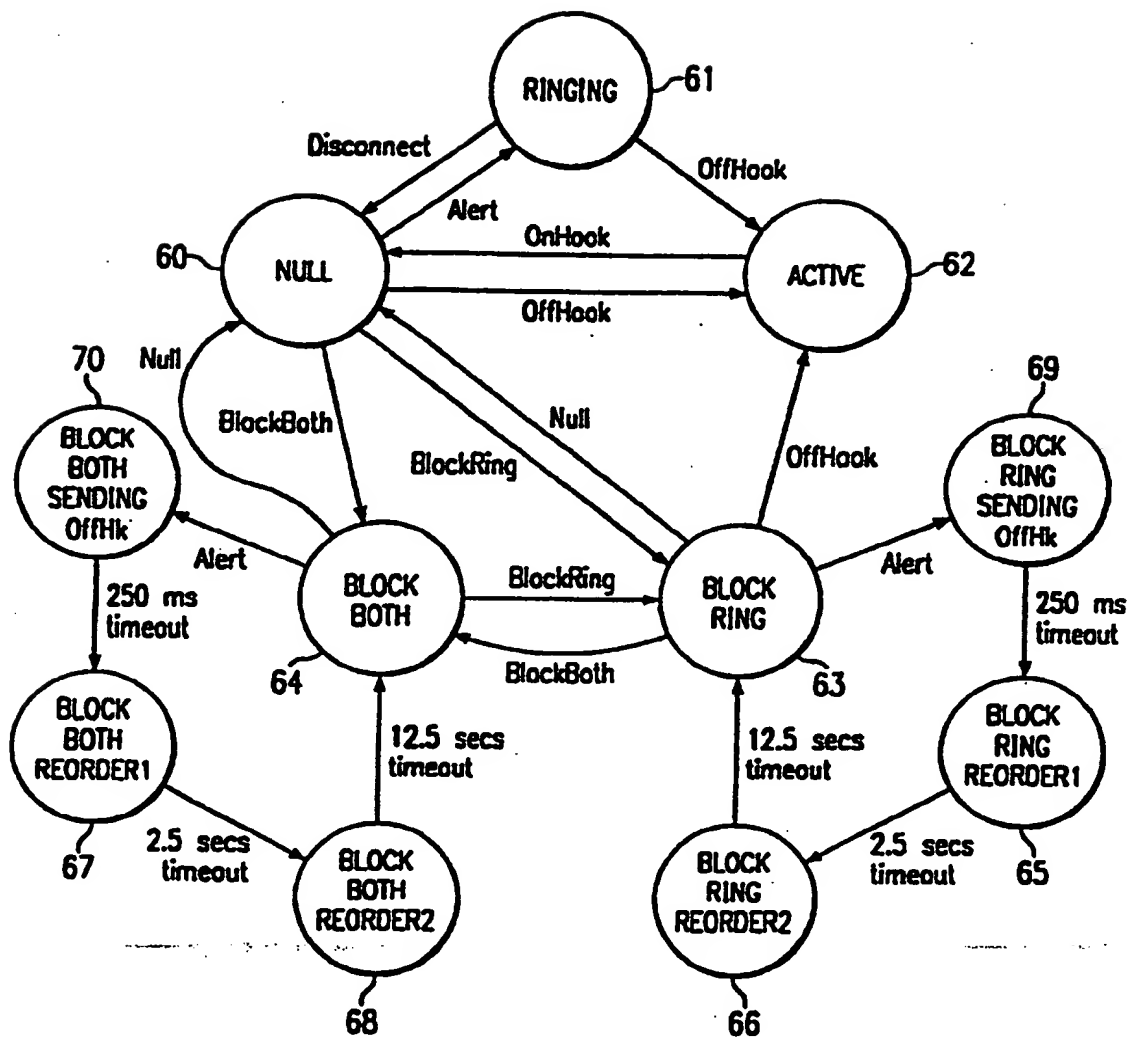


FIG. 3

3/3

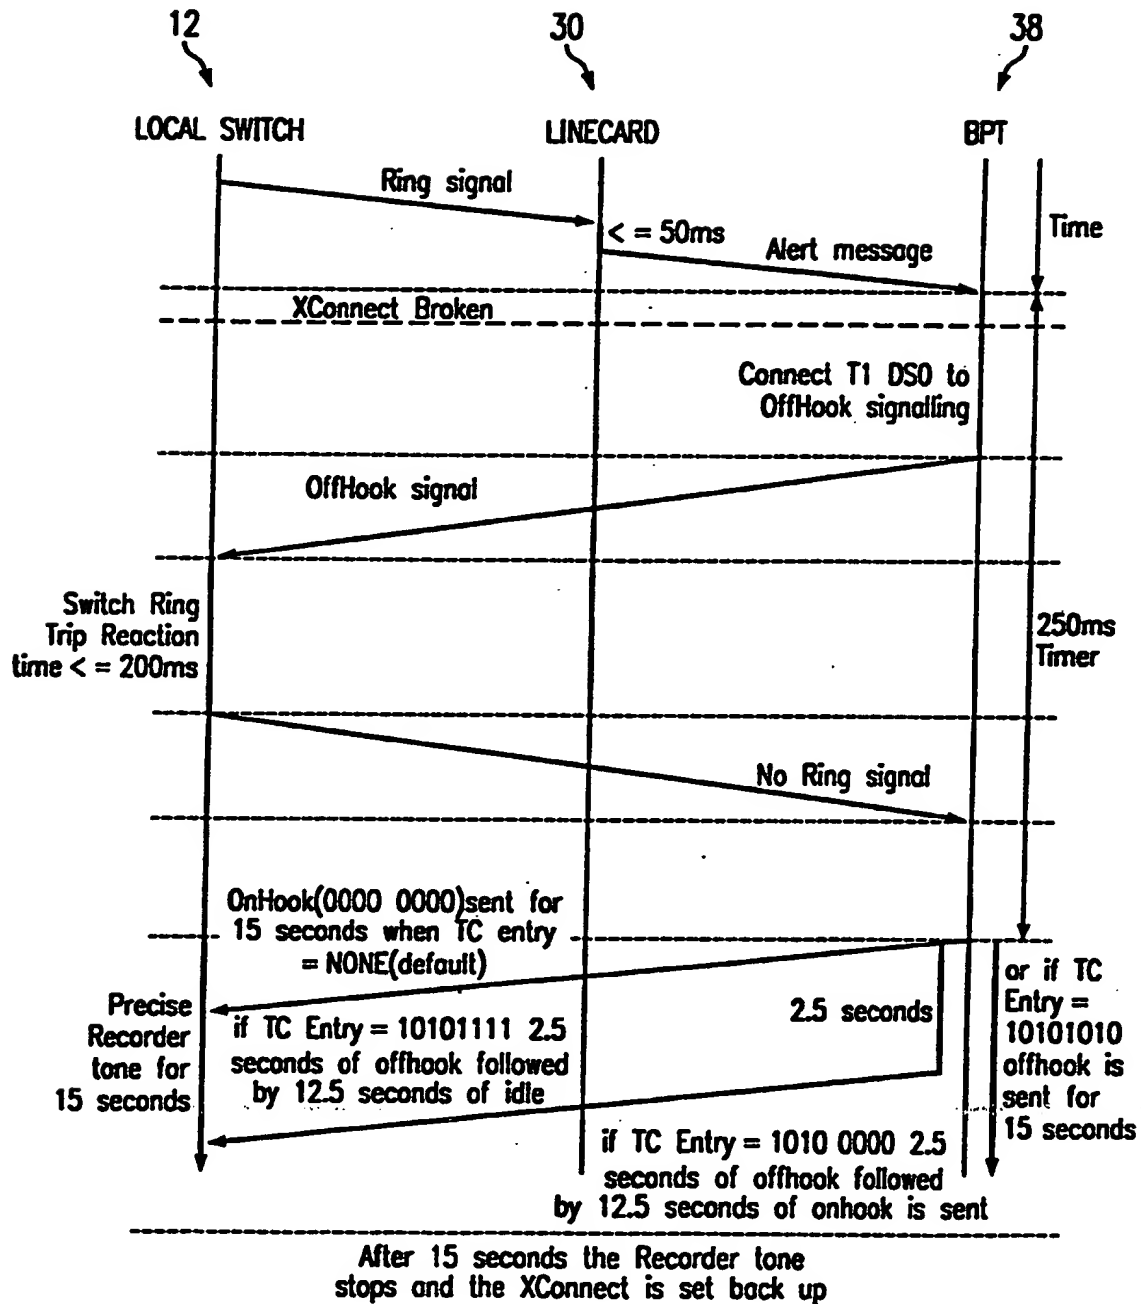


FIG. 4

# INTERNATIONAL SEARCH REPORT

h. National Application No  
PCT/US 99/31063

A. CLASSIFICATION OF SUBJECT MATTER  
IPC 7 H04M19/00 H04M3/36

According to International Patent Classification (IPC) or to both national classification and IPC

**B. FIELDS SEARCHED**

Minimum documentation searched (classification system followed by classification symbols)  
IPC 7 H04M

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

**C. DOCUMENTS CONSIDERED TO BE RELEVANT**

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	US 4 593 272 A (BERKOWITZ PAUL R) 3 June 1986 (1986-06-03)	1,2,12, 13
A	DE 44 20 430 C (SIEMENS AG) 12 October 1995 (1995-10-12)	
A	"ELECTRONIC SWITCHING" STUDIES IN TELECOMMUNICATIONS, NL, AMSTERDAM, ELSEVIER SCIENCE PUBL, vol. 2, 1981, pages 413-415, XP002130357	
A	EP 0 643 524 A (FUJITSU LTD) 15 March 1995 (1995-03-15)	
A	EP 0 452 286 A (ERICSSON TELEFON AB L M) 16 October 1991 (1991-10-16)	

☐ Further documents are listed in the continuation of box C.

☒ Patent family members are listed in annex.

\* Special categories of cited documents :

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier document but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.

"&" document member of the same patent family

Date of the actual completion of the international search

20 April 2000

Date of mailing of the international search report

04/05/2000

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2  
NL - 2280 HV Rijswijk  
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,  
Fax: (+31-70) 340-3016

Authorized officer

Vandevenne, M

# INTERNATIONAL SEARCH REPORT

Information on patent family members

International Application No

PCT/US 99/31063

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
US 4593272 A	03-06-1986	NONE	
DE 4420430 C	12-10-1995	NONE	
EP 0643524 A	15-03-1995	JP 7087235 A US 5457741 A	31-03-1995 10-10-1995
EP 0452286 A	16-10-1991	SE 465799 B AU 650263 B AU 7541091 A BR 9106161 A CA 2074479 A DE 69112887 D DE 69112887 T DK 452286 T ES 2077836 T FI 923862 A GR 3017667 T IE 69576 B NO 923433 A PT 97039 A, B SE 9000929 A WO 9114333 A US 5323453 A	28-10-1991 16-06-1994 10-10-1991 16-03-1993 16-09-1991 19-10-1995 14-03-1996 13-11-1995 01-12-1995 28-08-1992 31-01-1996 02-10-1996 03-09-1992 31-03-1993 16-09-1991 19-09-1991 21-06-1994